



www.suc-led.com

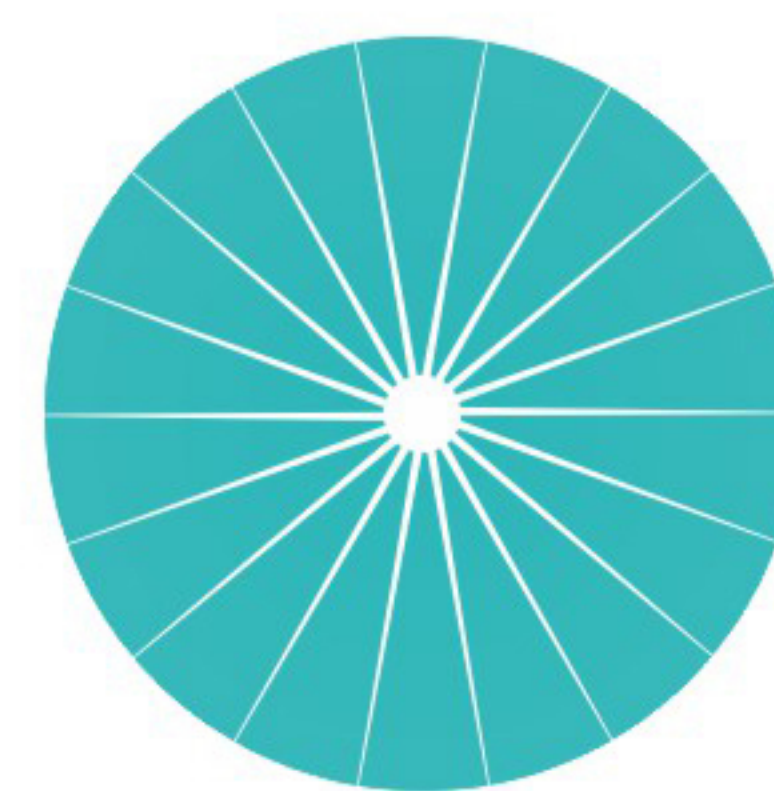

SUC®

更爱LED灯

Nature, Fresh, Love LED light more

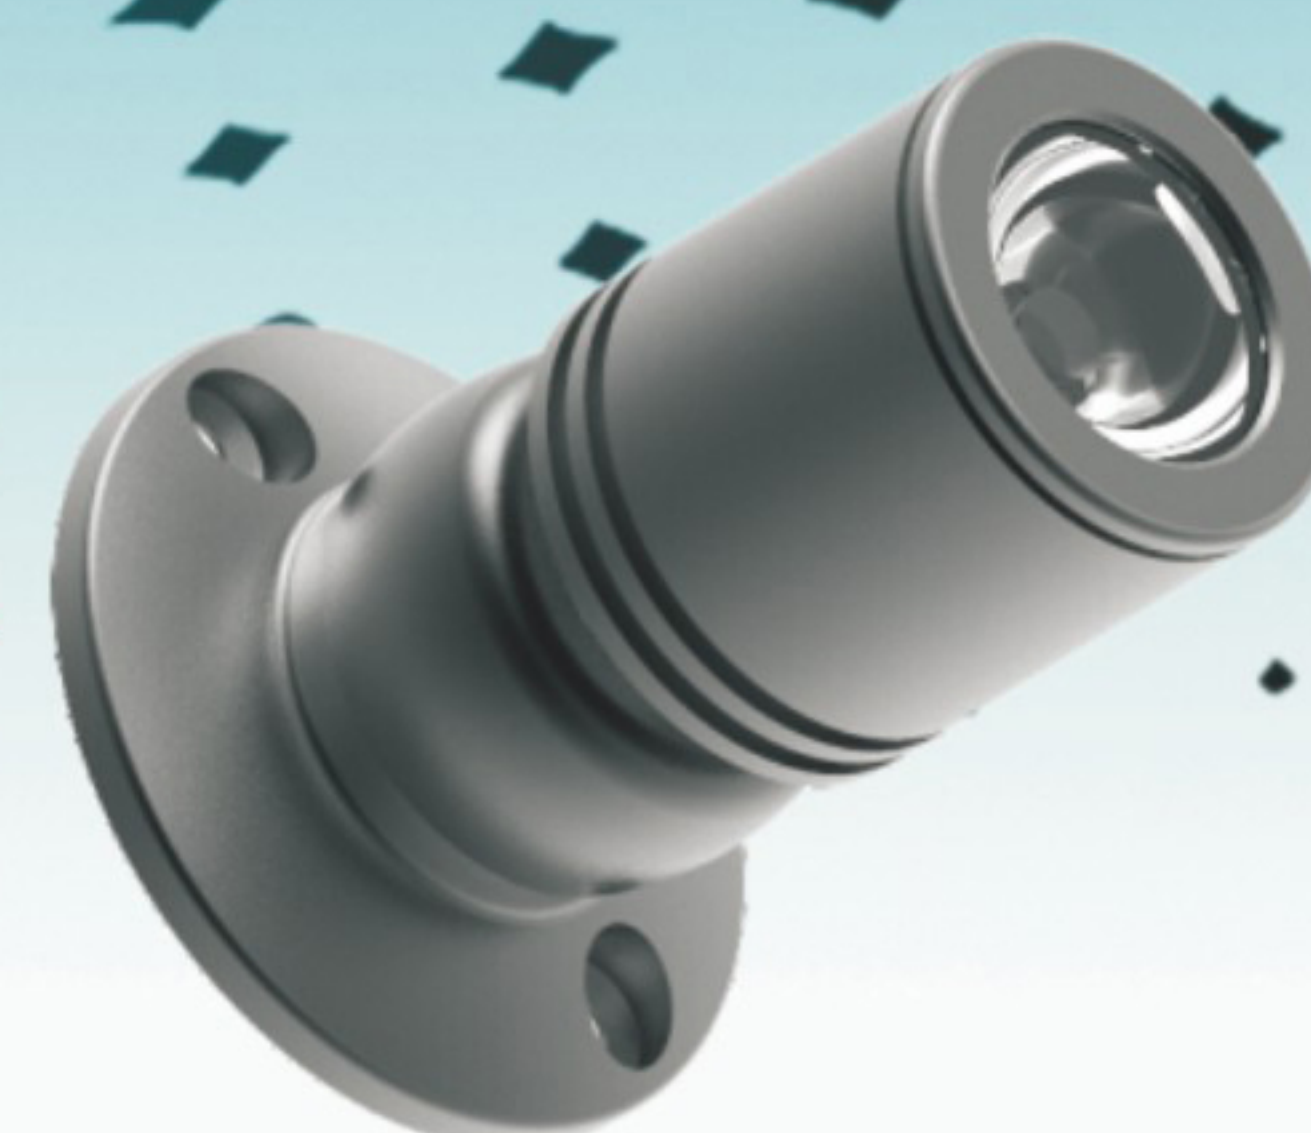

+86-574-87451962

地址：宁波市望春工业园区丰泰路99号
Add: No. 99 Fengtai Road, Wangchun Industrial Zone, Ningbo, Zhejiang, China

传真(Fax): +86-574-87468398
Email: sales@suc-led.com

网址(Website): www.suc-led.com
http://sucled.en.made-in-china.com/



Model No.: SLCG-E003
Rated Voltage: DC2~4V 350mA
Material: Aluminum alloy
Rated Power: 1W (cree)
Lumen: 72~103LM
CRI: Ra>80
CCT: 2700K~6500K
Beam Angle: 10°15°45°
Lifespan: 30000H
Working temperature: -20~50°C
Dimension: $\varnothing$ 26*24mm



Model No.: SLT-02
Rated Voltage: DC2~4V 350mA
Material: Aluminum alloy
Rated Power: 1W
Lumen: 70~102LM
CRI: Ra>80
CCT: 2700~6500K
Beam Angle: 60°
Lifespan: 30000H
Working Temperature: -20~50°C
Dimension: $\varnothing$ 24*19.5mm



Model No.: SLCG-F004
Rated Voltage: DC2~4V 700mA
Material: Aluminum alloy
Rated Power: 1W
Lumen: 103~180LM
CRI: Ra>80
CCT: 2700K~6500K
Beam Angle: 10°, 15°, 25°, 35°, 45°
Lifespan: 30000H
Working Temperature: -20~50°C
Dimension: $\varnothing$ 42*29mm



Model No.: SLCG-C006-2
Rated Voltage: DC2~4V 700mA
Material: Aluminum alloy
Rated Power: 2.1W
Lumen: 137~208LM
CRI: Ra>80
CCT: 2700~6500K
Beam Angle: 25°
Lifespan: 30000H
Working Temperature: -20~50°C
Dimension: $\varnothing$ 50*24.5mm



Model No.: SLCG-F006
Rated Voltage: DC2~4V 700mA
Material: Aluminum alloy
Rated Power: 2.1W
Lumen: 103~180LM
CRI: Ra>80
CCT: 2700K~6500K
Beam Angle: 10°, 15°, 25°, 35°, 45°
Lifespan: 30000H
Working Temperature: -20~50°C
Dimension: $\varnothing$ 42*29mm
Hole Size: $\varnothing$ 34



Model No.: SLCG-E005
Rated Voltage: DC2~4V 350mA
Material: Aluminum alloy
Rated Power: 1W (cree)
Lumen: 72~103LM
CRI: Ra>80
CCT: 2700~6500K
Beam Angle: 15°
Lifespan: 30000H
Working Temperature: -20~50°C
Dimension: $\varnothing$ 52.5*45mm



Model No.: SLCG-F001
Rated Voltage: DC2~4V 700mA
Material: Aluminum alloy
Rated Power: 1W (cree)
Lumen: 103~180LM
CRI: Ra>80
CCT: 2700K~6500K
Beam Angle: 10°, 15°, 25°, 35°, 45°
Lifespan: 30000H
Working Temperature: -20~50°C
Dimension: $\varnothing$ 42*29mm
Hole Size: $\varnothing$ 34



Model No.: SLCG-F002
Rated Voltage: DC2~4V 700mA
Material: Aluminum alloy
Rated Power: 1W
Lumen: 103~180LM
CRI: Ra>80
CCT: 2700~6500K
Beam Angle: 10°, 15°, 25°, 35°, 45°
Lifespan: 30000H
Working Temperature: -20~50°C
Dimension: $\varnothing$ 42*27mm



Model No.: SLCG-F005
Rated Voltage: DC2~4V 350mA
Material: Aluminum alloy
Rated Power: 1W
Lumen: 72~101LM
CRI: Ra>80
CCT: 2700~6500K
Beam Angle: 120°
Lifespan: 30000H
Working Temperature: -20~50°C
Dimension: $\varnothing$ 42*21mm
Hole Size: $\varnothing$ 34





Model No.: SLCG-CG06
Rated Voltage: DC8~13V 350mA
Material: Aluminum alloy
Rated Power: 3*1W (cree)
Lumen: 165~210LM
CRI: Ra>80
CCT: 2700K~6500K
BeamAngle: 15°, 25°, 45°
Lifespan: 30000H
Working Temperature: -20~50°C
Dimension: $\varnothing$ 54.4*41*247mm



Model No.: SLCG-CG15
Rated Voltage: DC12~18V 350mA
Material: Aluminum alloy
Rated Power: 5*1W (cree)
Lumen: 316~380LM
CRI: Ra>80
CCT: 2700K~6500K
BeamAngle: 15° 25° 45° 60°
Lifespan: 30000H
Working Temperature: -20~50°C
Dimension: $\varnothing$ 390*33.2*22.6mm



Model No.: SLCG-CG15-B
Rated Voltage: DC8~13V 350mA
Material: Aluminum alloy
Rated Power: 3*1W (cree)
Lumen: 165~210LM
CRI: Ra>80
CCT: 2700K~6500K
BeamAngle: 15°, 25°, 45°, 60°
Lifespan: 30000H
Working Temperature: -20~50°C
Dimension: $\varnothing$ 300*23*27mm



Model No.: SLCGH003
Rated Voltage: DC2~4V 350mA
Material: Aluminum alloy
Rated Power: 1W
Lumen: 68~98LM
CRI: Ra>80
CCT: 2700K~6500K
BeamAngle: 10°, 15°, 45°
Lifespan: 30000H
Working Temperature: -20~50°C
Dimension: $\varnothing$ 36*187mm



Model No.: SLCG-H008
Rated Voltage: DC8~13V 350mA
Material: Aluminum alloy
Rated Power: 3*1W
Lumen: 165~210LM
CRI: Ra>80
CCT: 2700K~6500K
BeamAngle: 120°
Lifespan: 30000H
Working Temperature: -20~50°C
Dimension: $\varnothing$ 36.5*265mm




Model No.: SLCG-B002
Rated Voltage: DC2~4V 500mA
Material: Aluminum alloy
Rated Power: 2W
Lumen: 137~208LM
CRI: Ra>80
CCT: 2700K~6500K
BeamAngle: 10°, 15°, 45°
Lifespan: 30000H
Working Temperature: -20~50°C
Dimension: $\varnothing$ 41*300mm
Hole Size: $\varnothing$ 9



Model No.: SLCG-CG19
Rated Voltage: DC2~4V 350mA
Material: Aluminum alloy
Rated Power: 1W
Lumen: 72~103LM
CRI: Ra>80
CCT: 2700K~6500K
BeamAngle: 15°, 25°, 45°, 60°
Lifespan: 30000H
Working Temperature: -20~50°C
Dimension: $\varnothing$ 308*50mm
Hole Size: $\varnothing$ 12



Model No.: SLCG-CG08-A
Rated Voltage: DC10~14V 180mA
Material: Aluminum alloy
Rated Power: 2.5W
Lumen: 145~175LM
CRI: Ra>80
CCT: 2700K~6500K
BeamAngle: 100°
Lifespan: 30000H
Working Temperature: -20~50°C
Dimension: $\varnothing$ 13*10*350mm

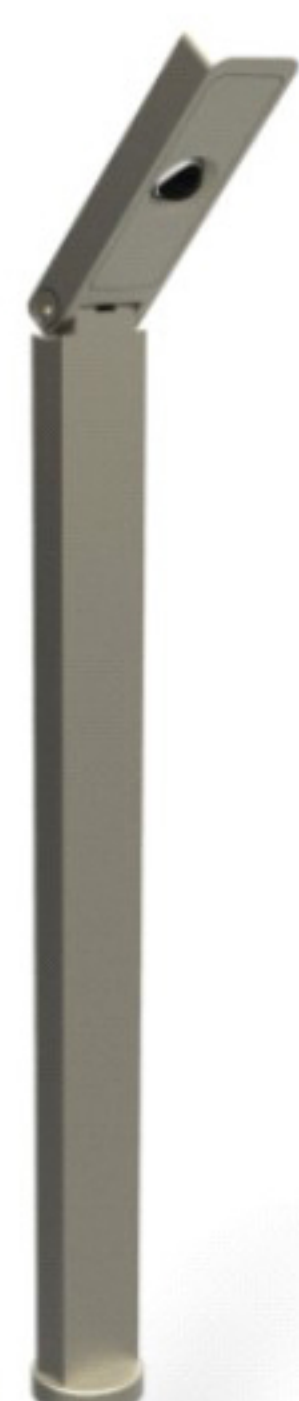

Model No.: SLCG-CG13-C
Rated Voltage: DC2~4V 700mA
Material: Aluminum alloy
Rated Power: 2.1W
Lumen: 90~110LM
CRI: Ra>80
CCT: 2700K~6500K
BeamAngle: 25°
Lifespan: 30000H
Working Temperature: -20~50°C
Dimension: $\varnothing$ 297*7*20mm





Model No.: SLCG-A003
Rated Voltage: DC12V/24V
Material: Aluminum alloy
Rated Power: 3W
Lumen:160~200LM
CRI:Ra>80
CCT:2700~6500K
BeamAngle:100°
Lifespan:30000H
Working Temperature:-20~50℃
Dimension: Ø 58*17.5mm



Model No.: SLCG-CG15-C
Rate Voltage: DC3V 350mA
Material: Aluminum alloy
Rated Power: 1W (cree)
Lumen:72~103LM
CRI:Ra>80
CCT:2700~6500K
BeamAngle:15°, 25°, 45°, 60°
Lifespan:30000H
Working Temperature:-20~50℃
Dimension: Ø 35*37mm



Model No.: SLCG-A003-1
Rated Voltage: DC12V/24V
Material: Aluminum alloy
Rated Power: 3W
Lumen:160~200LM
CRI:Ra>80
CCT:2700~6500K
BeamAngle:100°
Lifespan:30000H
Working Temperature:-20~50℃
Dimension: Ø 59*7.5mm



Model No.: SLCG-B001
Rate voltage: DC2~4V 350mA
Material: Aluminum alloy
Rated Power: 1W (cree)
Lumen:72~103LM
CRI:Ra>80
CCT:2700~6500K
BeamAngle:10°, 15°, 45°
Lifespan:30000H
Working Temperature:-20~50℃
Dimension: Ø 31*39.7mm



Model No.: SLCG-B003
Rated Voltage: DC2~4V 700mA
Material: Aluminum alloy
Rated Power: 3W (cree)
Lumen: 103~180LM
CRI: Ra>80
CCT: 2700~6500K
BeamAngle: 10°15°25°30°45°
Lifespan: 30000H
Working Temperature: -20~50℃
Dimension: Ø 30*70mm



Model No: SLCG-G004-1
Rate Voltage: DC8~12V 500mA
Material: Aluminum alloy
Rated Power: 4.5W (cree)
Lumen:380~410LM
CRI:Ra>80
CCT:2700~6500K
BeamAngle:15°24°38°
Lifespan:30000H
Working Temperature:-20~50℃
Dimension: Ø 42*75mm



(Website): www.suc-led.com
<http://sucled.en.made-in-china.com/>