

LED

SUC[®]
Suit your dream






OUR ADVANTAGES

- 1 Export more than 20 countries and regions, has wholly owned subsidiaries in Germany and United States.
- 2 Top 10 brands in China, used in national landmarks and dozens of city Landscape projects.
- 3 More than one hundred projects at home and abroad, NASA, the world's largest indoor botanical garden .
- 4 The leading research and development capabilities in China , has more than 50 patents of invention and innovation.
- 5 The whole LED industrial chain manufacturers.
- 6 The lifespan of LED lamp higher than ordinary lights at least twice.
- 7 Germany exclusive designers, can private customize.
- 8 The earliest producer in China, will reply within four hours for after-sale service



Certificates

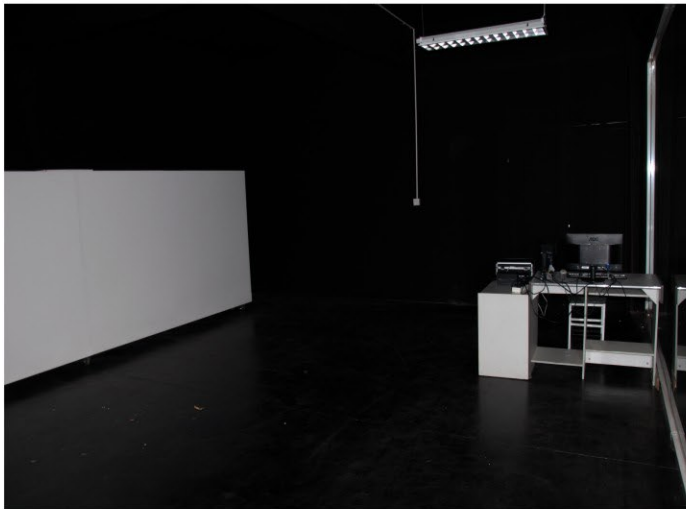

Instruments and equipment


SLB-501

NEW



Description

- Material: Aluminium alloy
- Housing Colour: Silver
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -20°C ~ +50°C
- Dimension: 150*91*56mm



Parameters

CREE

- Rated Power: 7.1W
- Rated Voltage: AC220V
- LED Qty: 3pcs
- Beam Angle: 3° × 149°
- CCT: 2700-6500K
- CRI: Ra ≥ 80




SLB-D03A

NEW



Description

- Material: Die casting aluminum
- Housing Colour: Silver, Black, White, Gray, Customize
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +50°C
- Net Weight: 1.50KG



Parameters

CREE

- Rated Power: 12W
- Rated Voltage: DC24V
- LED Qty: 12pcs
- Beam Angle: 12°, 30°
- CCT: 2700-6500K
- CRI: Ra ≥ 80




SLB-500

NEW



Description

- Material: Aluminum alloy
- Housing Colour: Silver
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -20°C ~ +50°C
- Dimension: 280*158*97.5mm



Parameters

OSRAM

- Rated Power: 40W
- Rated Voltage: AC220V
- LED Qty: 6pcs
- Beam Angle: 3°
- CCT: 2700-6500K
- CRI: Ra ≥ 80




SLB-17B



Description

- Material: Aluminium alloy and Crystal cover
- Housing Colour: Silver, Black
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +50°C
- Net Weight: 0.20KG



Parameters

- Rated Power: 2.5W
- Rated Voltage: DC24V
- LED Qty: 12pcs
- Beam Angle: 130°
- CCT: 2700-6500K
- CRI: Ra ≥ 80




OSRAM

SLB-35



Description

- Material: Aluminum alloy
- Housing Colour: Silver, Black
- Ingress Protection: IP65
- Ta: -25~50°C
- Lifespan: 30,000H
- Net Weight: 0.28KG



Parameters

- Rated Power: 3W
- Rated Voltage: DC12V
- LED Qty: 1pc
- Beam Angle: 4° x 22°
- CCT: 2700-6500K
- CRI: Ra ≥ 80




OSRAM

SLB-40



Description

- Material: Die casting aluminum
- Housing Colour: Black, Silver
- Ingress Protection: IP65
- Working Temperature: -25°C ~ +50°C
- Lifespan: 30,000H
- Net Weight: 0.75KG

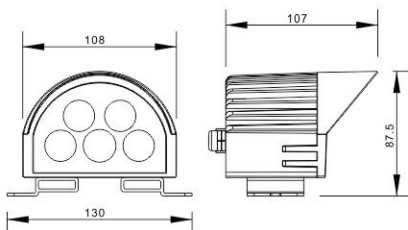

Parameters

- Rated Power: 10W
- Rated Voltage: AC220V
- LED Qty: 5pcs
- Beam Angle: 20° × 60°, 20° × 30°, 30° × 60°, 20° × 40°, 10° × 60°, 15° × 50°
- CCT: 2700-6500K
- CRI: Ra ≥ 80



OSRAM

SPX-301

NEW




Description

- Material: Aluminum alloy
- Housing Colour: Black, Silver
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -20°C~+50°C
- Dimension: 1010*33*42.6mm

Parameters

- Rated Power: 24W
- Rated Voltage: DC24V
- LED Qty: 24pcs
- Beam Angle: 25 × 45°
- CCT: 2700-6500K
- CRI: Ra ≥ 80

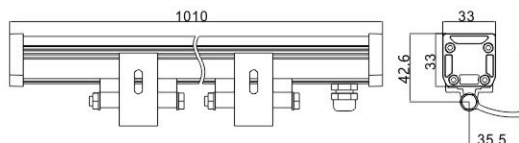

SLX-700

NEW



Description

- Material: Aluminum alloy
- Housing Colour: Dark grey
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -20°C~+50°C
- Dimension: 993 ± 2 * 80 * 133mm

Parameters

- Rated Power: 75W
- Rated Voltage: AC220V
- LED Qty: 12pcs
- Beam Angle: 50°
- CCT: RGBW
- Control: DMX



SLX-24R

NEW




Description


- Material: Aluminum alloy
- Housing Colour: Black, Silver, Customize
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -20°C~+50°C
- Dimension: 1002*23.1*33.7mm

Parameters

- Rated Power: 12W
- Rated Voltage: DC24V
- LED Qty: 48pcs
- Beam Angle: 120°
- CCT: 2700-6500K
- CRI: Ra ≥ 80

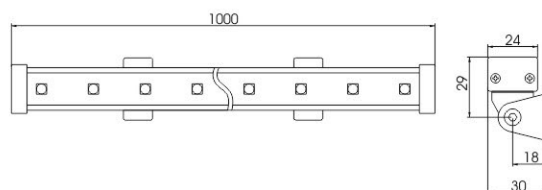


SLX-08

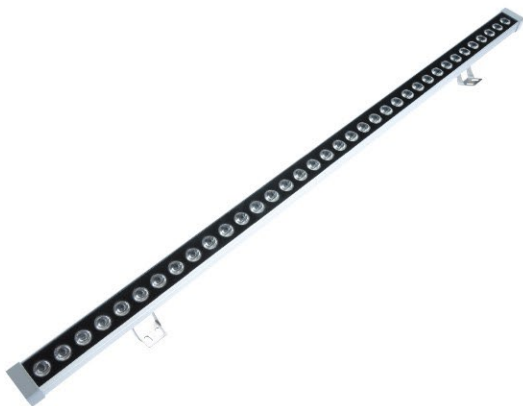

Description

- Material: Aluminum alloy
- Housing Colour: Black, Silver
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +60°C
- Net Weight: 1.40KG



Parameters

CREE

- Rated Power: 36W
- Rated Voltage: DC24V
- LED Qty: 36pcs
- Beam Angle: 15° × 35°, 20°
- CCT: 2700-6500K, RGB
- Input voltage: DC24V




SLX-07



Description

- Material: Aluminum alloy
- Housing Colour: Black, Silver
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +60°C
- Net Weight: 2.45KG

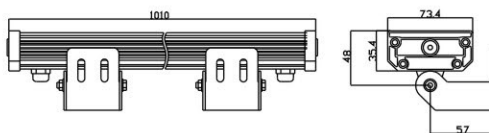

Parameters

E-DISON

- Rated Power: 70W
- Rated Voltage: DC24V
- LED Qty: 48pcs
- Beam Angle: 20°
- CCT: 2700-6500K, RGB
- CRI: Ra ≥ 80




SLX-11



Description

- Material: Aluminum alloy
- Housing Colour: Black, Silver
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +60°C
- Net Weight: 0.98KG

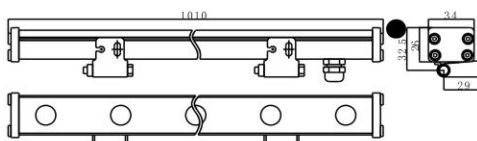

Parameters

OSRAM

- Rated Power: 18W
- Rated Voltage: DC24V
- LED Qty: 18pcs
- Beam Angle: 15° × 35°
- CCT: 2700-6500K, RGB
- CRI: Ra ≥ 80



SLX-28




Description

- Material: Aluminum alloy
- Housing Colour: Black, Silver
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +50°C
- Net Weight: 0.46KG

Parameters

- LRated Power: 10.5W
- Rated Voltage: DC24V
- LED Qty: 48pcs
- Beam Angle: 100°
- CCT: 2700-6500K, RGB
- CRI: Ra ≥ 80

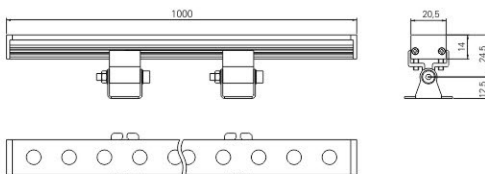

SLX-18A

Patent protection




Description

- Material: Aluminum alloy
- Housing Colour: Black, Silver
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +60°C
- Net Weight: 1.18KG

Parameters

- Rated Power: 18W
- Rated Voltage: DC24V
- LED Qty: 18pcs
- Beam Angle: 25° × 50°
- CCT: 2700-6500K, RGB
- CRI: Ra ≥ 80

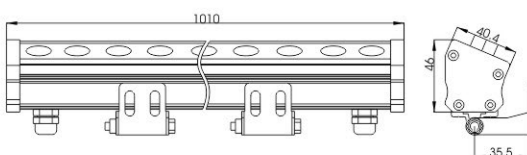

SLX-37B




Description

- Material: Aluminum alloy
- Housing Color: Silver, Black
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +60°C
- Net Weight: 1.48KG

Parameters

- Rated Power: 36W
- Rated Voltage: DC24V
- LED Qty: 36pcs
- Beam Angle: 25° × 40°
- CCT: 2700-6500K, RGB
- CRI: Ra ≥ 80

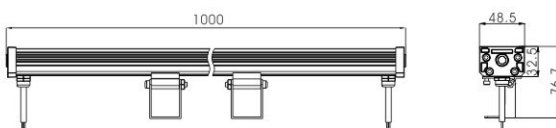


SLX-06

Patent protection



Description

- Material: Aluminum alloy
- Housing Colour: Black, Silver
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +60°C
- Net Weight: 1.18KG

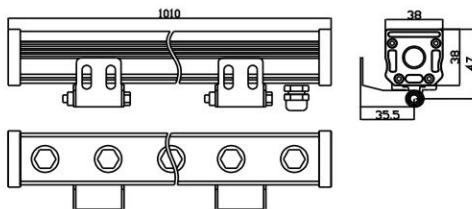

Parameters



- Rated Power: 24W
- Rated Voltage: DC24V
- LED Qty: 24pcs
- Beam Angle: 30° x 40°
- CCT: 2700-6500K, RGB
- CRI: Ra ≥ 80




SLX-06B



Description

- Material: Aluminum alloy
- Housing Colour: Black/Silver
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +60°C
- Net Weight: 1.32KG



Parameters



- Rated Power: 36W
- Rated Voltage: DC24V
- LED Qty: 36pcs
- Beam Angle: 30° x 40°
- CCT: 2700-6500K, RGB
- CRI: Ra ≥ 80




SLX-06H



Description

- Material: Aluminum alloy
- Housing Colour: Black/Silver
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +60°C
- Net Weight: 1.85KG



Parameters



- Rated Power: 36W
- Rated Voltage: AC220-240V
- LED Qty: 36pcs
- Beam Angle: 30° x 40°, 20
- CCT: 2700-6500K
- CRI: Ra ≥ 80



SLX-03




Description

- Material: Aluminum alloy
- Housing Colour: Black, Silver
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +60°C
- Net Weight: 1.98KG


Parameters

CREE

- Rated Power: 60W
- Rated Voltage: DC24V
- LED Qty: 36pcs
- Beam Angle: 15° x 35°
- CCT: 2700-6500K, RGB
- CRI: Ra ≥ 80



SLX-19

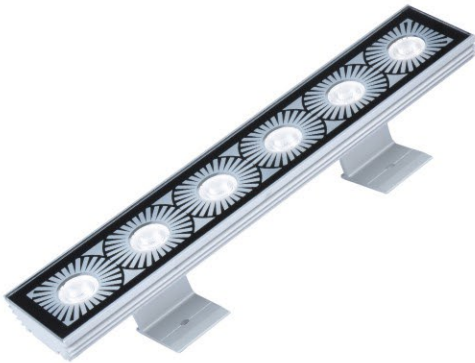


Description

- Material: Aluminum alloy
- Housing Colour: Black, Silver
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +60°C
- Net Weight: 0.83KG

Parameters

CREE

- Rated Power: 18.5W
- Rated Voltage: DC24V
- LED Qty: 6pcs
- Beam Angle: 20° x 35°
- CCT: 2700-6500K
- CRI: Ra ≥ 80

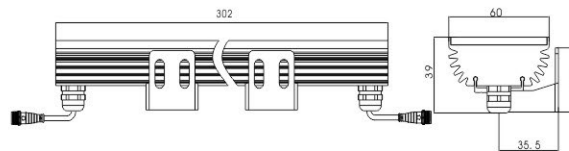


SLS-100

NEW



Description

- Material: Aluminum alloy
- Housing Colour: Silver, Black
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -20°C ~ +50°C
- Dimension: 68*54mm

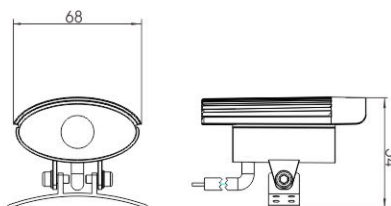

Parameters

CREE

- Rated Power: 3W
- Rated Voltage: DC24V
- LED Qty: 3pcs
- Beam Angle: 30°
- CCT: 2700-6500K
- CRI: Ra ≥ 80




SLS-700

NEW



Description

- Material: Die casting aluminium
- Housing Colour: Black, Silver
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -20°C ~ +50°C
- Dimension: 232x251x365mm

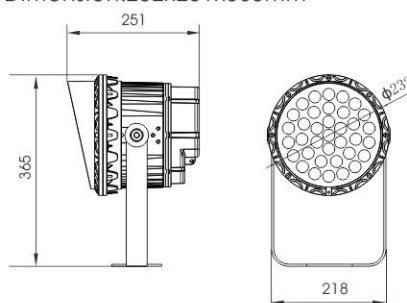

Parameters

CREE

- Rated Power: 75W
- Rated Voltage: AC220V
- LED Qty: 36pcs
- Beam Angle: 30°
- CCT: 2700-6500K
- CRI: Ra ≥ 80




SLS-16



Description

- Material: Die casting aluminum
- Housing Colour: Silver, Black, Customize
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +50°C
- Net Weight: 0.44KG



Parameters

E-DISON

- Rated Power: 7.5W
- Rated Voltage: DC24V
- LED Qty: 6pcs
- Beam Angle: 15°
- CCT: 2700-6500K
- CRI: Ra ≥ 80




SLS-22A



Description

- Material: Aluminum alloy
- Housing Color: Silver, Black, Customize
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +50°C
- Net Weight: 0.76KG



Parameters

- Rated Power: 9W
- Rated Voltage: DC24V
- LED Qty: 3pcs
- Beam Angle: 15°
- CCT: 2700-6500K
- CRI: Ra ≥ 80




SLS-21



Description

- Material: Aluminum alloy
- Housing Color: Silver, Black, Customize
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +50°C
- Net Weight: 0.22KG



Parameters

- Rated Power: 3.5W
- Rated Voltage: DC12V
- LED Qty: 3pcs
- Beam Angle: 20°
- CCT: 2700-6500K
- CRI: Ra ≥ 80




SLS-15



Description

- Material: Die casting aluminum
- Housing Colour: Black/Silver
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -20°C ~ +50°C
- Net Weight: 0.25KG



Parameters

- Rated Power: 3.8W
- Rated Voltage: DC12V
- LED Qty: 3pcs
- Beam Angle: 25°
- CCT: 2700-6500K
- CRI: Ra ≥ 80




SLS-24A



Description

- Material: Die casting aluminum
- Housing Colour: Black, Silver
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +50°C
- Net Weight: 0.56KG



Parameters

CREE

- Rated Power: 12W
- Rated Voltage: DC24V
- LED Qty: 6pcs
- Beam Angle: 12°
- CCT: 2700-6500K
- CRI: Ra ≥ 80




SLS-24B



Description

- Material: Die casting aluminum
- Housing Colour: Black, Silver
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +50°C
- Net Weight: 2.12KG



Parameters

CREE

- Rated Power: 24W
- Rated Voltage: DC24V
- LED Qty: 12pcs
- Beam Angle: 20°
- CCT: 2700-6500K
- CRI: Ra ≥ 80




SLS-24C



Description

- Material: Die casting aluminum
- Housing Colour: Black, Silver
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +50°C
- Net Weight: 3.02KG

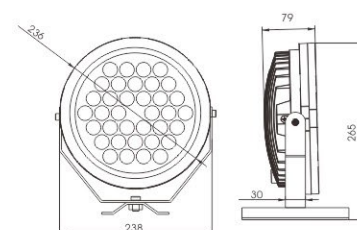

Parameters

CREE

- Rated Power: 36W, 46W
- Rated Voltage: DC24V
- LED Qty: 36pcs
- Beam Angle: 12°, 20°
- CCT: 2700-6500K, RGB
- CRI: Ra ≥ 80




SLS-44



Description

- Material: Die casting aluminum
- Housing Colour: Silver, Black
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +50°C
- Net Weight: 2.06KG

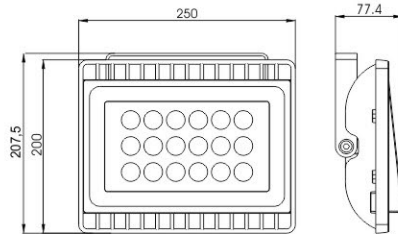

Parameters



- Rated Power: 18W
- Rated Voltage: DC24V
- LED Qty: 18pcs
- Beam Angle: 35° (other choice)
- CCT: 2700-6500K
- CRI: Ra ≥ 80




SLM-05



Description

- Material: Aluminium alloy
- Housing Colour: Black
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -20°C ~ +50°C
- Net Weight: 0.10KG

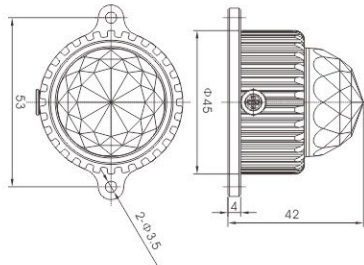

Parameters



- Rated Power: 1.5W
- Rated Voltage: DC24V
- LED Qty: 6pcs
- Beam Angle: 120°
- CCT: 2700-6500K, RGB
- CRI: Ra ≥ 80




SLM-78



Description

- Material: Die casting aluminum
- Housing Colour: Silver
- Ingress Protection: IP65
- Lifespan: 30,000H
- Working Temperature: -20°C ~ +50°C
- Net Weight: 0.15KG

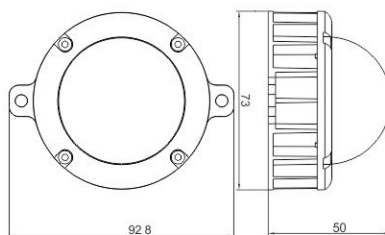

Parameters



- Rated Power: 4W
- Rated Voltage: DC24V
- LED Qty: 12pcs
- Beam Angle: 145°
- CCT: 2700-6500K, RGBW
- CRI: Ra ≥ 80
- Control: DMX




SLD-120



Description

- Material: Aluminium housing and +Die casting aluminum cover
- Housing Colour: Silver, Black
- Ingress Protection: IP67
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +50°C
- Net Weight: 0.65KG



Parameters

- Rated Power: 7W
- Rated Voltage: DC 12V
- LED Qty: 3pcs
- Beam Angle: 30°
- CCT: 2700-6500K
- CRI: Ra ≥ 80




SLD-180



Description

- Material: Die casting aluminium housing and Stainless steel cover
- Housing Colour: Silver, Black
- Ingress Protection: IP67
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +50°C
- Net Weight: 1.30KG



Parameters

- Rated Power: 7.5W
- Rated Voltage: DC 12V
- LED Qty: 6pcs
- Beam Angle: 30°
- CCT: 2700-6500K, RGB
- CRI: Ra ≥ 80




SLD-200



Description

- Material: Die casting aluminium housing and Stainless steel cover
- Housing Colour: Black/Silver
- Ingress Protection: IP67
- Lifespan: 50,000H
- Working Temperature: -25°C ~ +50°C
- Net Weight: 1.82KG:



Parameters

- Rated Power: 23W
- Rated Voltage: DC 24V
- LED Qty: 18pcs
- Beam Angle: 30°
- CCT: 2700-6500K, RGB
- CRI: Ra ≥ 80
- Input voltage: DC 24V




SLW-07A



Description

- Material: Brass
- Housing Colour: Yellow
- Ingress Protection: IP68
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +50°C
- Net Weight: 0.78KG

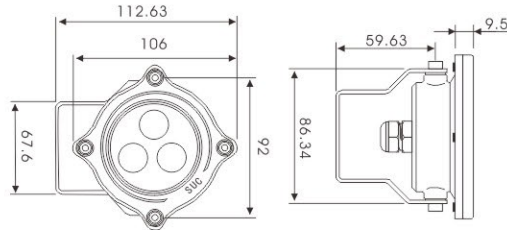

Parameters




- Rated Power: 3.8W
- Rated Voltage: DC12V
- LED Qty: 3pcs
- Beam Angle: 12° 30°
- CCT: Red
- CRI: Ra ≥ 80

SLW-07



Description

- Material: Brass
- Housing Colour: Yellow
- Ingress Protection: IP68
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +50°C
- Net Weight: 1.35KG

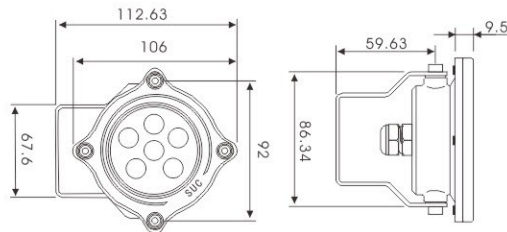

Parameters



- Rated Power: 7.5W
- Rated Voltage: DC24V
- LED Qty: 6pcs
- Beam Angle: 12° 30°
- CCT: 2700-6500K, Green, RGB
- CRI: Ra ≥ 80




SLW-08A



Description

- Material: Brass
- Housing Colour: Yellow
- Ingress Protection: IP68
- Lifespan: 30,000H
- Working Temperature: -25°C ~ +50°C
- Net Weight: 1.92KG


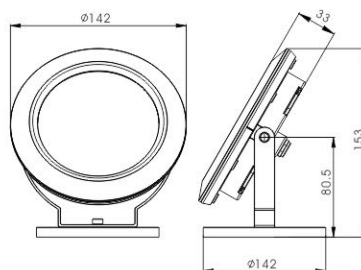


Parameters



- Rated Power: 36W
- Rated Voltage: DC24V
- LED Qty: 18pcs
- Beam Angle: 30°
- CCT: 2700-6500K, RGB
- CRI: Ra ≥ 80



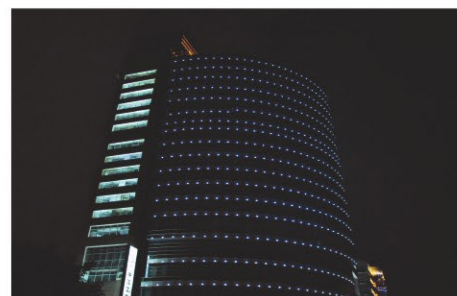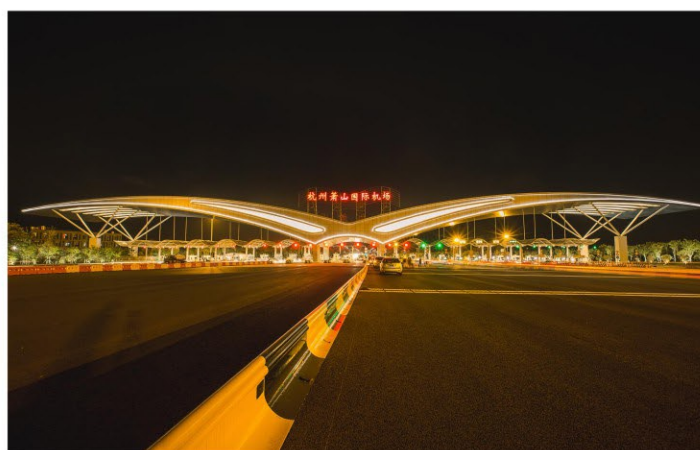

Hangzhou G20 Summit



PRODUCTS

SUC is specializing in researching, developing, producing and selling high power LED lighting products. Its main product range is LED Wall Washer, LED Spot Light, LED Cabinet Light, LED Ceiling Light, LED Underwater Light, LED Inground Light and LED Modules.

QUALITY CONTROL

Our LED chips from CREE; OSRAM

SUC hold excellent quality control during all the process of individual products, including supplier assess, production process control, and strict inspection before delivery etc.

R & D


SUC has a top-class R&D center with advanced equipments and testing facilities. More than 20 engineers are working in this passionate and professional R&D team.

SERVICE

SUC has first-class services for customers and always consider win-win co-operations. We offer a fast delivery time around 15 days to save time for customers.

VISION & MISSION

With the vision of "developing leading technologies, striving for a world-class brand", SUC win a good reputation and widespread satisfaction from customers. In target of "creating cutting-edge technologies, and building first-class products" SUC has been pursuing "appreciation, dedication, continuous learning and exceeding" as the spirit of enterprise. We put high quality and professional service first and continue to meet customers' requests.

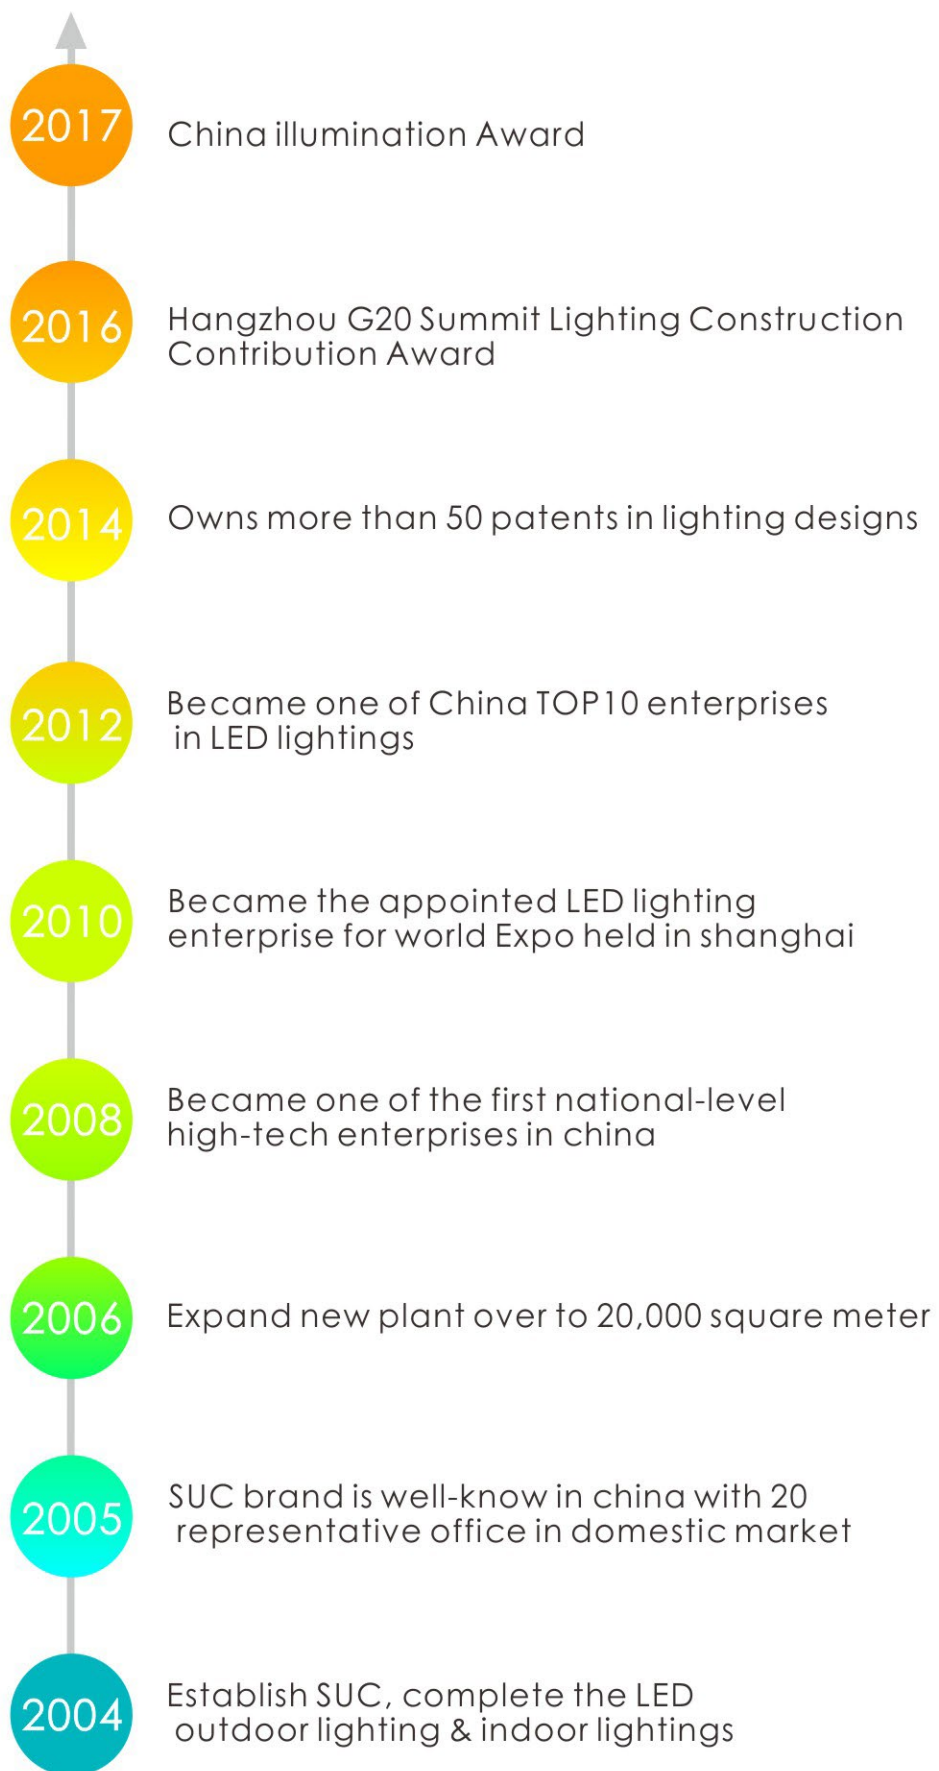

Ningbo SUC Light & Power Technology Co.,Ltd

 No.99 FengTai Road,Wangchun Industrial Zone,NingBo China

 +86-574-87451962

 Sales@suc-led.com

 +86-574-87468398

 www.suc-led.com
<http://sucled.en.made-in-china.com>

